

# Extension and Platform Ladders

*Elevating your safety with  
unique ladder solutions!*



# Step Platform Ladder

Engineered for optimal safety and efficiency, with its robust construction and innovative features, this platform ensures stability, reliability, and customizable options to meet diverse job requirements. Fit for purpose, including, electrical work, maintenance tasks, or industrial projects, it provides a secure and convenient solution for elevated work, ensuring peace of mind and productivity on the job.

## FPE-AT

**EuroMaster All Terrain Safety Step Platform**  
Meets EN 131-7:2013

Model	Platform height	Open Height	Closed height	Weight	Maximum load rating
<b>FPE-AT 0.9</b>	0.86 m	1.82 m	2.01 m	21.1 kg	150 kg
<b>FPE-AT 1.2</b>	1.15 m	2.11 m	2.30 m	22.7 kg	150 kg
<b>FPE-AT 1.4</b>	1.44 m	2.39 m	2.59 m	24.3 kg	150 kg
<b>FPE-AT 1.7</b>	1.72 m	2.68 m	2.88 m	26.0 kg	150 kg
<b>FPE-AT 2.0</b>	2.01 m	2.97 m	3.16 m	29.7 kg	150 kg
<b>FPE-AT 2.3</b>	2.29 m	3.25 m	3.72 m	36.0 kg	150 kg
<b>FPE-AT 2.6</b>	2.58 m	3.54 m	3.98 m	37.7 kg	150 kg

Platform height	Closed height	Maximum load rating
Open Height	Weight	

Optional Accessories: See back of the brochure.



## FPE-PM

**EuroMaster Premium Safety Step Platform**

Model	Platform height	Open Height	Closed height	Weight	Maximum load rating
<b>FPE-PM-0.6</b>	0.57 m	1.53 m	1.72 m	15.8 kg	150 kg
<b>FPE-PM-0.9</b>	0.86 m	1.82 m	2.01 m	17.1 kg	150 kg
<b>FPE-PM-1.2</b>	1.15 m	2.11 m	2.30 m	18.7 kg	150 kg
<b>FPE-PM-1.4</b>	1.44 m	2.39 m	2.59 m	21.3 kg	150 kg
<b>FPE-PM-1.7</b>	1.72 m	2.68 m	2.88 m	22.9 kg	150 kg
<b>FPE-PM-2.0</b>	2.01 m	2.97 m	3.16 m	27.3 kg	150 kg
<b>FPE-PM-2.3</b>	2.30 m	3.25 m	3.45 m	28.9 kg	150 kg
<b>FPE-PM-2.6</b>	2.58 m	3.54 m	3.74 m	30.8 kg	150 kg
<b>FPE-PM-2.9</b>	2.87 m	3.83 m	4.04 m	32.5 kg	150 kg

Optional Accessories: See back of the brochure.



## Problems with platforms

- Unstable and Cumbersome.
- Limited Reach.
- Restricted working area/deck.
- Compromised safety.

## Our Solution

- **Enhanced Stability:** TerrainMaster ensures a stable base, especially when side ways force is applied.
- **Safety Assurance:** Front & Rear safety rail at 900mm, large deck, step covers & fiberglass construction ensure user safety.
- **Customisable Options:** Front split rail, outdoor wheels, tool trays offer tailored solutions.
- **Quick Setup and Portability:** Enables quick assembly, and easy storage.

# Extension Ladder

Euro PowerMaster Extension is built for any terrain, indoors or out. Its individual adjustable legs and tethering system offer the convenience and stability that users and safety experts have been asking for and it meets the EN-131 Higher Stability standard.

## FEU-UT

### Euro PowerMaster Extension - Utility Ladder

Model	↕	↗	⚖️	⚠️
FEU 3.9 UT	2.74 m	3.86 m	18.5 kg	150 kg
FEU 5.1 UT	3.34 m	5.06 m	21.5 kg	150 kg
FEU 6.3 UT	3.94 m	6.26 m	24.5 kg	150 kg
FEU 7.5 UT	4.54 m	7.45 m	31.0 kg	150 kg
FEU 8.7 UT	5.14 m	8.66 m	34.1 kg	150 kg
FEU 9.3 UT	5.70 m	9.26 m	39.0 kg	150 kg
FEU 9.6 UT	5.74 m	9.56 m	39.0 kg	150 kg



Closed height



Max load rating




Extended height



Weight

Optional Accessories: See back of the brochure.

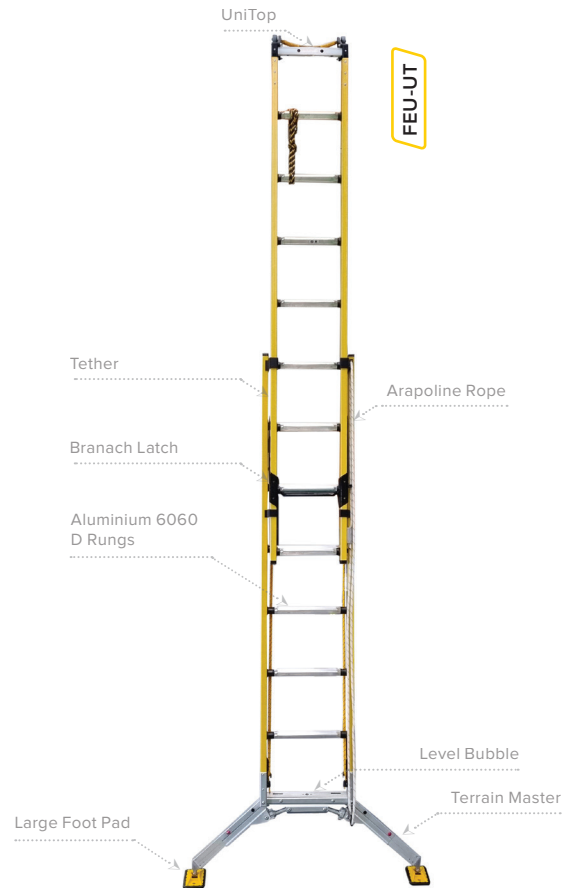

## Problems with ladders

- Unstable footing.
- Dangerous overreaching.
- Incorrect set up.
- Difficult ladder positioning in tight space.

## Our Solution

- **Solid base:** TerrainMaster levelling system adjusts up to a slope of 15 degrees for a perfect level base, every time.
- **Safe climb:** Tethers to structure or ground for locked-in safety.
- **Innovative UniTop:** Customised attachments for challenging height access.
- All models are **Repairable** and **Electrically Safe**.

# EN795 Fall Control System

## Higher Stability

An innovative, portable, and mobile solution for ensuring the safety of workers at heights. Our unique system is designed to keep workers safe while ascending, descending, or in the event of a fall, slip, or medical event issue. Certified to Standard **EN 795** and **EN131** or personal fall protection.

### FEU EN795-FC

#### EN 795 Fall Control System

MODEL	↕	⬆	⚠	⚠
<b>FEU 3.9 EN795 FC</b>	2.90 m	3.90 m	22.5 kg / 25.0 kg	150 kg
<b>FEU 5.1 EN795 FC</b>	3.50 m	5.10 m	25.5 kg / 28.0 kg	150 kg
<b>FEU 6.3 EN795 FC</b>	4.10 m	6.29 m	26.5 kg / 29.0 kg	150 kg
<b>FEU 7.5 EN795 FC</b>	4.70 m	7.50 m	36.0 kg / 38.5 kg	150 kg
<b>FEU 8.7 EN795 FC</b>	5.30 m	8.70 m	40.0 kg / 42.5 kg	150 kg
<b>FEU 9.3 EN795 FC</b>	5.60 m	9.30 m	41.5 kg / 44.0 kg	150 kg
<b>FEU 9.6 EN795 FC</b>	5.90 m	9.60 m	44.0 kg / 46.5 kg	150 kg


↕ Closed height

⬆ Extended height

⚠ Max load rating (Ladder / EN795 FC)

⚠ Weight (Without Bag / With Bag)

Optional Accessories: See back of the brochure.

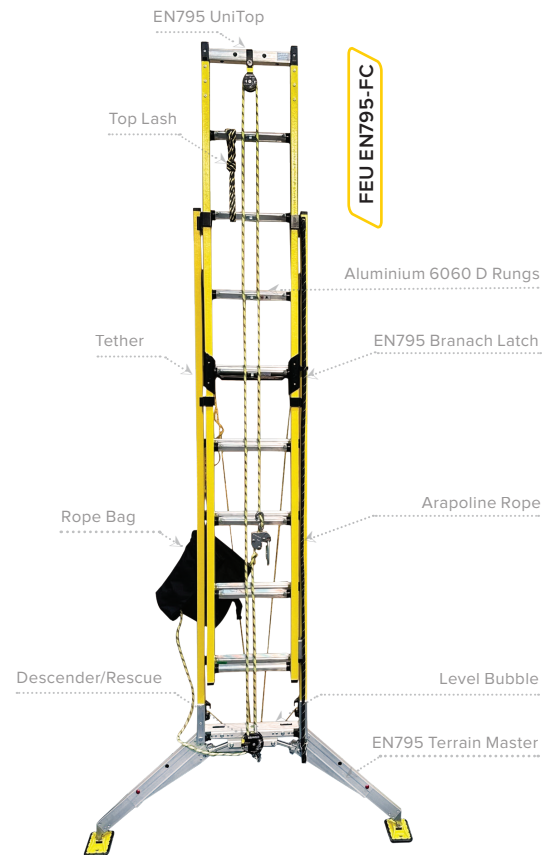

## Problems with ladders

- Ladder movement = falls from ladder.
- Absence of suitable anchor points.
- Lack of fall protection & rescue options.
- Costly setup and productivity loss due to unique height access challenges.


## Our Solution

- **Ladder Secured:** Integrated tethers and TerrainMaster, secures ladder ensuring stability from the ground up.
- **Fall Protection:** Lifeline connects user to ladder for safety during use.
- **Integrated Rescue System** eliminates risks for second person.
- **Portable,** mobile, and quick setup enhances productivity and saves costs.
- **Innovative UniTop:** Customised attachments for challenging height access.



# CorrosionMaster Step Platform Specialty Ladder

Specifically engineered for portability and height access in harsh and corrosive environments, the CorrosionMaster Safety Step Platform is ideal for Pharmaceutical, Maritime, Mining and similar industries where corrosion resistance is crucial.

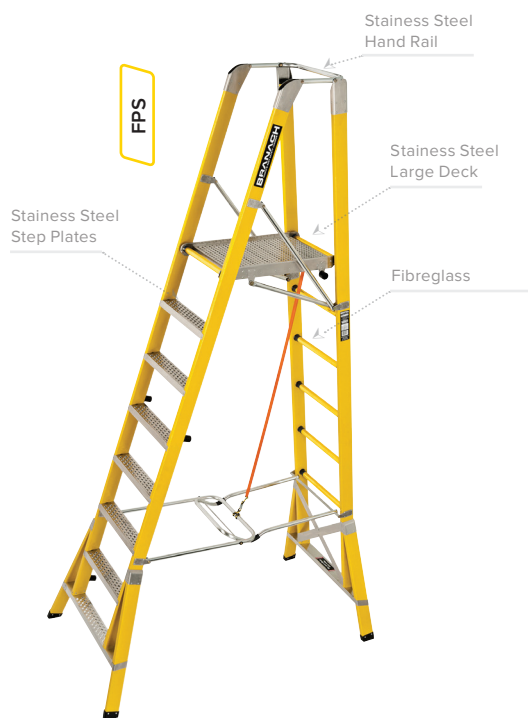

# Tunnel Ladder Specialty Ladder - Access Equipment

The Tunnel Ladder is specifically designed with optimal ergonomics in mind, significantly reducing back strain and enhancing overall safety for users. Its secure and stable platform greatly boosts worker well-being and productivity, making it the ideal solution for challenging tunnel projects that require reliable and effective access. With its innovative features, this ladder ensures a safer working environment for all involved.



## FPS CorrosionMaster Step Platform

Model	Platform height	Front to rear spread	Weight	Maximum load rating
FPS 0.6	0.58 m	0.98 m	19.5 kg	150 kg
FPS 0.9	0.90 m	1.10 m	22.5 kg	150 kg
FPS 1.2	1.17 m	1.23 m	25.5 kg	150 kg
FPS 1.5	1.46 m	1.35 m	28.5 kg	150 kg
FPS 1.8	1.75 m	1.48 m	31.5 kg	150 kg
FPS 2.1	2.04 m	1.60 m	36.0 kg	150 kg
FPS 2.4	2.34 m	1.73 m	39.0 kg	150 kg
FPS 3.0	2.92 m	1.98 m	45.0 kg	150 kg
FPS 3.6	3.50 m	2.23 m	51.0 kg	150 kg

Platform height  
Front to rear spread  
Maximum load rating  
Weight

Optional Accessories: See back of the brochure.

## FPT Tunnel Ladder

Model	Platform height	Open Height	Weight	Maximum load rating
FPT 0.9	0.96 m	1.76 m	21.5 kg	150 kg
FPT 1.2	1.20 m	2.05 m	23.0 kg	150 kg
FPT 1.5	1.50 m	2.34 m	24.5 kg	150 kg
FPT 1.8	1.80 m	2.63 m	26.0 kg	150 kg
FPT 2.1	2.10 m	2.93 m	27.5 kg	150 kg
FPT 2.4	2.40 m	3.23 m	29.0 kg	150 kg
FPT 2.7	2.70 m	3.51 m	30.5 kg	150 kg
FPT 3.0	3.00 m	3.80 m	32.0 kg	150 kg


Platform height  
Open Height  
Maximum load rating  
Weight

Optional Accessories: See back of the brochure.




# UniTop System & UniTop Attachments

UniTop accessories are only compatible with the Branach mounting system



Wide Pole Top Attachment  
**TW**



Stand Off Wall Mounts  
**SA**



Tool Hoist  
**TJ**



Vertical Wheels for Demountable UniTop\*\*  
**VW**



Demountable UniTop  
**TQ**

## The Uni Top System


The Branach Uni Top is a versatile addition to all Fall Control and Utility ladders. Designed to enhance safety and functionality, it allows for various attachments to be easily connected into place. Positioned at the top of the ladder, this feature provides a customizable solution for different tasks, ensuring users can work more efficiently and securely.



Davit Arm System Kit - **DA** | Used with Fall Control System only

## Accessories


Extensions and Single Ladders - For a full list of accessories go to [branach.com](http://branach.com)




Cable Hooks  
**CH**



Fly Protector Strip  
**FP**



Bottom Lash  
**BL**



Rope Cleat  
**CT**



Company Mark  
**MK**

## Step Platform Ladders



Ladder Tag Identification  
**ID**



Tie Down Bar  
**TB**



Branach Retrofit Outdoor Wheel Kit  
**OB**



Wall Bracket  
**WB** 370mm single ladders  
**VW** 450mm single ladders

### BRANACH GmbH

Im Speyerer Tal 5, Halle 4, 76761 Rülzheim, Germany

t +49 1523 6750 888 (Germany)

t +40 743 238 006 (Romania)

e [sales@branach.com.au](mailto:sales@branach.com.au) w [www.branach.com](http://www.branach.com)

